



Type 7200BP Precision Back Pressure Regulator

For applications that require high relief capacity

The Type 7200BP Back Pressure Regulator is a high flow, highly accurate and repeatable pneumatic relief valve with an adjustable set point. It is a normally closed valve that will remain closed until the pressure at the inlet exceeds the regulator's set point. When pressure does exceed the regulator's setpoint, the valve will open and vent air until the pressure decreases to below the setpoint. A typical application is to provide protection against over pressurization in the downstream portion of a pneumatic system. In an over pressurization scenario, the air flowing through the 7200BP can be vented to atmosphere or could be captured and directed to trigger an emergency shut-off valve.

Features

- 1/4", 1/2", or 3/4" NPT Porting
- Two 1/4" NPT Gauge Ports
- Large Relief Valve
Allows flows up to 350 scfm.
- Sensitive
Reacts to pressure deviations to within 1/2" water column pressure.
- Stable Performance
Isolated control chamber prevents hunting and vibration during flow conditions.

Specifications

Maximum Flow Coefficients (Cv)	Port 3/4"	7.5
	1/2"	6.2
	1/4"	4.6
Exhaust Capacity	Depends on port size. See flow curves	
Sensitivity	Less than 1/2" water	
System Pressure	250 psig (17.5 bar) Maximum	
Operating Temperature	-40°F to 200°F (-40°C to 93°C)	
Weight	2.5 lbs (1.13kg)	
Mounting	Pipe, panel, or bracket	
Port Sizes	In/Out: 1/4", 1/2", or 3/4" NPT Gauge: (2) 1/4" NPT	






Materials of Construction

Housing	Diecast aluminum alloy
Bolting	Zinc plated steel
Internal Components	Stainless steel, plated steel, brass, aluminum
Elastomers	Nitrile
Knob	Phenolic plastic



Flow Characteristics

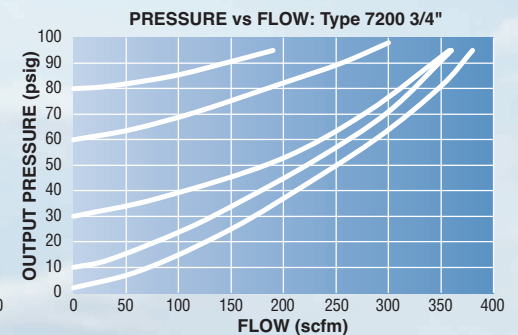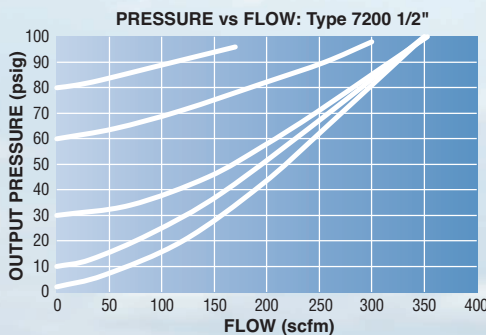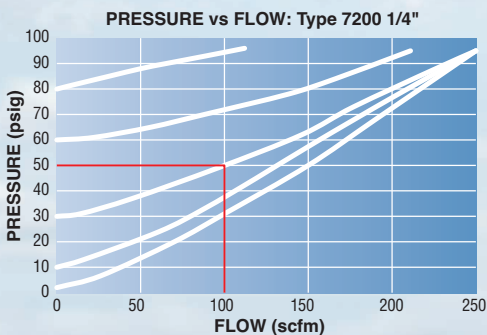

Relief Capacity Example: A Type 7200BP 1/4" NPT regulator is set to start relieving at 30 psig. As pressure exceeds the setpoint, it will start relieving. If the pressure were to reach 50 psig, the 7200BP would flow at a rate of 100 scfm.

